Ceiling Enclosure 2' x 2'

## CM-708-SK-0330 (as shown)

Applications:

This fully assembled ceiling mount enclosure installs in 2' x 2', 2' x 4' and 2' x 6' drop ceilings. This particular model has 6 RU of standard 19" passive rack mountable space and is fitted with a horizontal cable slack manager. Lockable secure door has a capacity of over 50 pounds and can be customized to user specifications to accept other component structures. Cover opens safely with two built-in pneumatic cylinders.

Features:

♦ Lockable secure lid design
♦ Removable door mounted assembly for 19" rack mounted panels and active equipment
♦ Total of 6 RU rack mountable space
♦ Multiple knockout configurations available
♦ Simplified design reduces network down time and labor costs associated with MAC work
♦ Constructed from 16 GA galvanized steel or aluminum with customer specified powder coat finish available
♦ Multiple sizes available
♦ Four point built-in support brackets for threaded rod or hangers
♦ Additional bracket configurations available
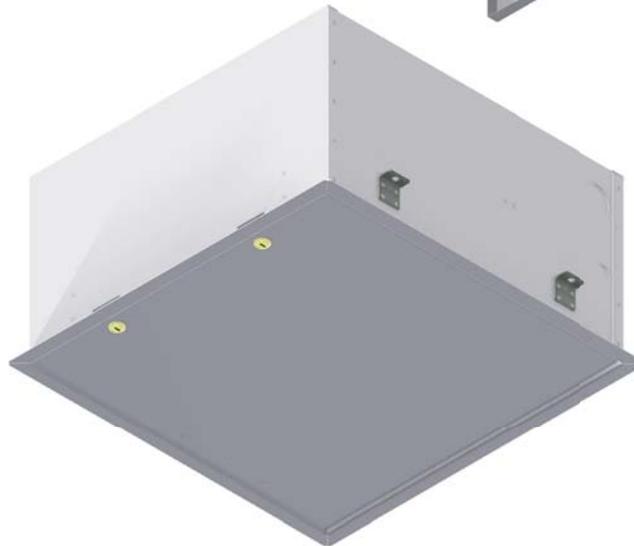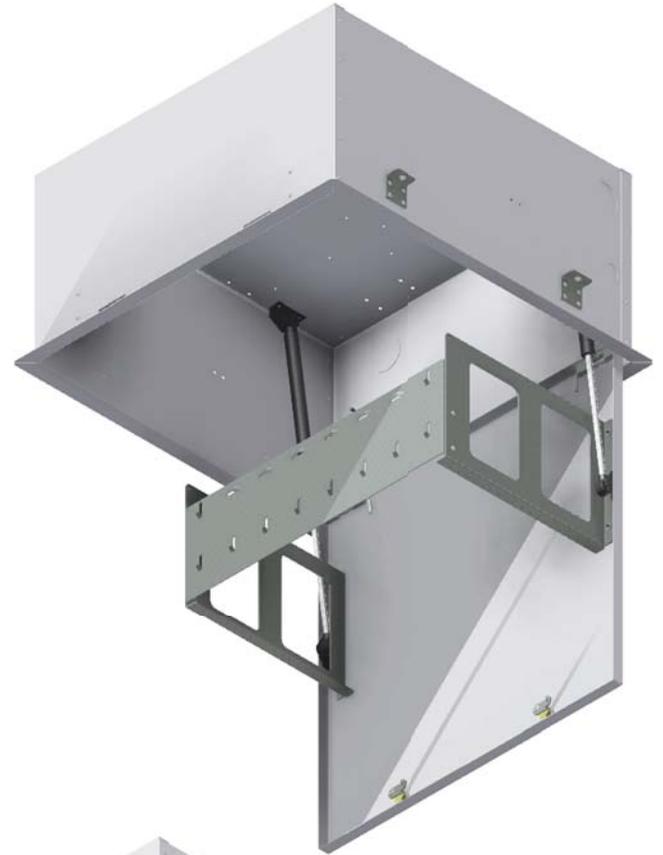
Dimensions as Shown

Length	Width	Depth
24"	24"	12"

CABLE MANAGEMENT SOLUTIONS, INC.

CABLE MANAGEMENT AND POWER DISTRIBUTION

Made in the USA